


Dam's name:


L'ETROIT

PKW's year of Construction:


2009



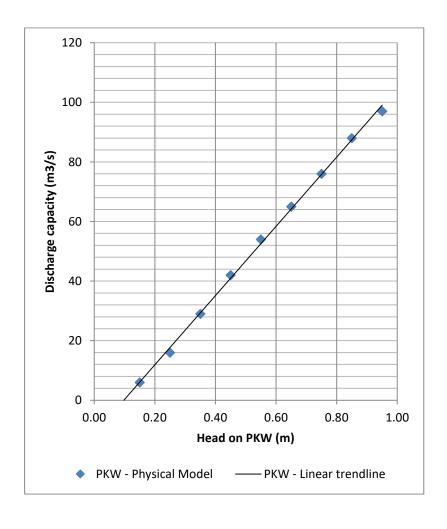


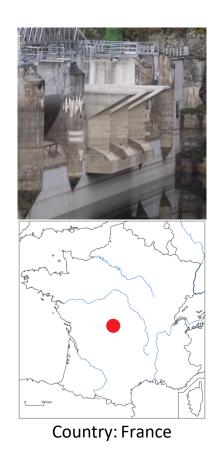


Progress of work :	Built
Dam's owner:	EDF
Consultant and physical model laboratory:	Artelia- Sogreah
Contractor:	Sogea
PKW location:	On the crest dam
Downstream energy dissipation type:	Deflector bucket
PKW purpose:	Increase discharge capacity
PKW discharge capacity at MWL (m3/s):	97
Surveillance devices (Presence and type):	No
Aeration (type and diameter of the pipe):	PVC pipe of 500 mm of diameter
Overflowing Frequency:	> 10 years
Number of overflow known:	0
Maximum head on PKW experienced (m) and date:	Unknown
Material of the PKW:	Reinforced concrete
Type of model used:	Physical
Type and number of other spillway:	2 gated spillway
B (m):	12.19
P (m):	5.02
W (m):	11.67
L (m):	62.61
Number of inlet:	2
W _i (m):	2.43 to 2.62
Number of outlet:	3
W _o (m):	1.5
<i>T_s</i> (m):	0.35



Plan view of the PKW



Upstream view of the PKW



Downstream view of the PKW

Comment:

A PKW auto-stable to avoid anchoring between the new structure and the old blowing one